

Specification	AXE5032P	Issue: 01	Date: 2009-09-18
----------------------	-----------------	-----------	------------------

Oscillator type : Programmable Crystal Oscillator in 5x3.2 mm package

Parameter	min.	typ.	max.	Unit	Condition
Frequency range	1		133	MHz	V _S = 5 V
	1		100	MHz	V _S = 3.3 V
	1		66	MHz	V _S = 2.7 V
Programmable frequencies	Any discrete frequency				At delivery
Frequency stability					
Overall stability			± 100 ± 50 ± 25	ppm ppm ppm	Option I = "100" Option I = "50" Option I = "25"
operating temperature range	0		+70	°C	Option II = "A"
	-20		+70	°C	Option II = "B"
	-40		+85	°C	Option II = "C"
long term (aging)			± 5	ppm/year	@ 25°C
RF output					
Signal waveform	HCMOS				
Load	15			pF	
Rise & decay time			5	ns	
Symmetry (duty cycle)	40		60	%	@ V _S /2
Start-up time			2	ms	
Jitter (RMS)			50	ps	Freq ≤ 33 MHz
			40	ps	Freq > 33 MHz
Output Enable/Disable (OE) Input	Open or HIGH: RF output LOW: Tri-state output				
Supply voltage V_S	2.5	2.7	3.0	V	Option III = "27"
	3.0	3.3	3.6	V	Option III = "33"
	4.5	5.0	5.5	V	Option III = "50"
Current consumption (steady state, unloaded)			20	mA	Option III = "27"
			25	mA	Option III = "33"
			45	mA	Option III = "50"
Operable temperature range	-45		+90	°C	
Storage temperature range	-55		+125	°C	
Enclosure (see drawing)	5.16 x 3.35 x 1.3 max.			mm	IEC 61837-2
Weight			5	gram	
Packing	Bulk or T&R				IEC 60286-3
ESD Sensitivity	1500			V	HBM, IEC 61000-4-2


Notes:

1. Terminology and test conditions are according to IEC standard IEC60679-1, unless otherwise stated

Ordering Code:

Model (Specification)	Option I	Option II	Option III	Frequency [MHz]
AXE5032P	100	A	50	12.345678

Enclosure drawing

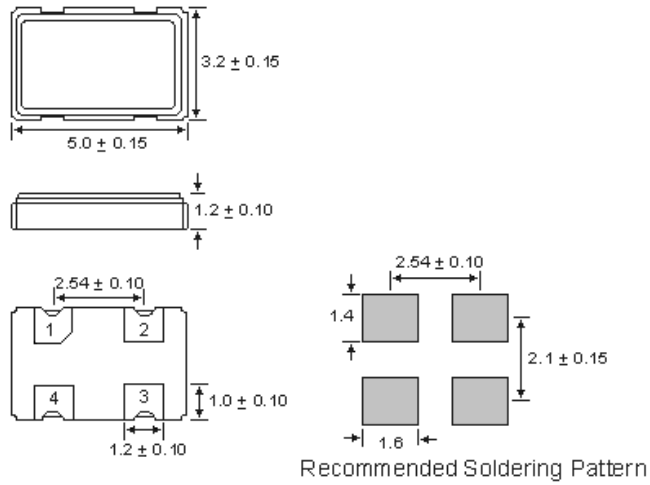

Pin connections

Pin #	Symbol	Function
1	OE	Output Enable/Disable
2	GND	Ground
3	RF OUT	RF Output
4	Vs	Supply Voltage

Environmental conditions

Test	IEC 60068 Part ...	IEC 60679-1 clause ...	Test conditions
Sealing tests (if applicable)	2-17	4.6.2	Gross leak: Test Qc, Fine leak: Test Qk
Solderability Resistance to soldering heat	2-20 2-58	4.6.3	Test Ta (235 ± 5)°C Method 1 Test Tb Method 1A, 5s
Shock*	2-27	4.6.8	Test Ea, 3 x per axes 100g, 6 ms half-sine pulse
Vibration, sinusoidal*	2-6	4.6.7	Test Fc, 30 min per axes, 10 Hz - 55 Hz 0,75mm; 55 Hz - 2 kHz, 10g
Endurance tests - ageing - extended aging		4.7.1 4.7.2	30 days @ 85°C, OCXO @25°C 1000h, 2000h, 8000h @85°C