

Specification	AXIOM30S	Issue: 03	Date: 2009-09-22
----------------------	-----------------	-----------	------------------

Oscillator type : OCXO Miniature size with Stratum 3E stability

Parameter	min.	typ.	max.	Unit	Condition
Frequency range	10		20	MHz	
Standard frequencies	10 / 12.8 / 20			MHz	
Frequency stability overall			± 4.6	ppm	Note 2
Initial tolerance			± 1.0	ppm	at time of shipment
vs. temperature in operating temperature range (steady state)			± 10	ppb	
Operating temperature range	0 -20 -40		50 70 85	°C °C °C	Option II = "050" Option II = "2070" Option II = "4085"
vs. supply voltage variation			± 1	ppb	V _S ± 5%
vs. load change			± 1	ppb	± 5%
Holdover 24 hours, full temp. range			± 12	ppb	Telcordia GR-1244 CORE or ITU-T G.813 Option 1
24 hours drift (after 30 days)			± 1	ppb	
Long term stability over 15 years			± 3.5	ppm	15 years
Frequency adjustment					
Electronic Frequency Control (EFC)		N.A.			N.A.
RF output					
Signal waveform	HCMOS				
Load	15			pF	
Rise & decay time			10	ns	
Symmetry (duty cycle)	40		60	%	
Warm-up time @25°C			5	min	$\Delta f_{final}/f_0 < \pm 0.1$ ppm
Phase noise @ 12.8 MHz		-90 -120 -140 -145		dBc dBc dBc dBc	1 Hz 10 Hz 100 Hz 1000 Hz
Short term stability (Allan Variance) $\sigma(\tau)$		0,2		ppb	$\tau = 10$ sec
Supply voltage V_S	3.15 4.75	3.3 5.0	3.45 5.25	V V	Option I = "33" Option I = "50"
Current consumption (steady state) @25°C			300 250	mA mA	Option I = "33" Option I = "50"
Current consumption (warm-up) @25°C			800 500	mA mA	Option I = "33" Option I = "50"
Operable temperature range	-45		+90	°C	
Storage temperature range	-55		+105	°C	
Enclosure (LxWxH) max.	20.5 x 20.5 x 12			mm	CO-15 (IEC 60679-3)
Weight			10	g	
Packing	Palette				IEC 60286-3
ESD Sensitivity	1500			V	HBM as in IEC 61000-4-2
Handling and Testing	In accordance with AXAN-011				www.axtal.com
Processing	In accordance with AXAN-012				www.axtal.com


Notes:

1. Terminology and test conditions are according to IEC standard IEC60679-1, unless otherwise stated
2. Overall frequency stability = initial tolerance + temp.stability + supply & load change + 15 years aging

Ordering Code:

Model (Specification)	Option I	Option II	Frequency [MHz]
AXIOM30S	50	050	12.800

Enclosure drawing

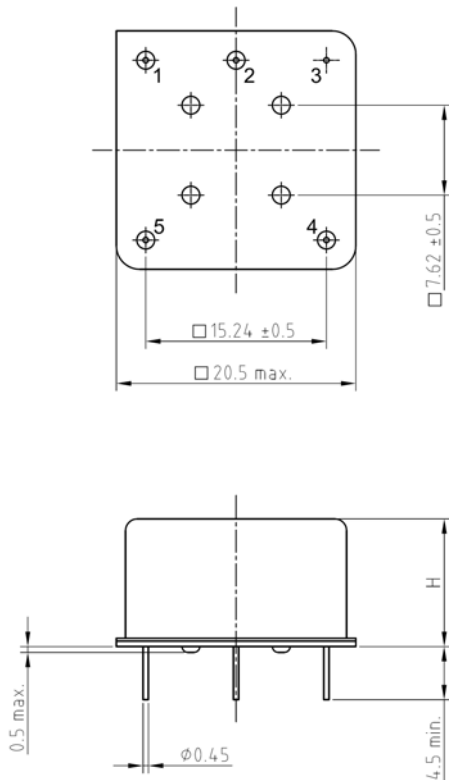

Pin connections

Pin #	Symbol	Function
1	V _S	Supply Voltage
2	RF OUT	RF Output
3	GND	Ground
4	N.C.	No Connection
5	N.C.	No Connection

Environmental conditions

Test	IEC 60068 Part ...	IEC 60679-1 clause ...	Test conditions
Sealing tests (if applicable)	2-17	4.6.2	Gross leak: Test Qc, Fine leak: Test Qk
Solderability Resistance to soldering heat	2-20 2-58	4.6.3	Test Ta (235 ± 5)°C Method 1 Test Tb Method 1A, 5s
Shock*	2-27	4.6.8	Test Ea, 3 x per axes 100g, 6 ms half-sine pulse
Vibration, sinusoidal*	2-6	4.6.7	Test Fc, 30 min per axes, 10 Hz - 55 Hz 0,75mm; 55 Hz - 2 kHz, 10g
Endurance tests - ageing - extended aging		4.7.1 4.7.2	30 days @ 85°C, OCXO @25°C 1000h, 2000h, 8000h @85°C

Other environmental conditions on request