

<b>Specification</b>	<b>AXIOM45</b>	Issue: 05	Date: 2010-03-01
----------------------	----------------	-----------	------------------

**Oscillator type : OCXO High stability, Sinewave Output**

Parameter	min.	typ.	max.	Unit	Condition
<b>Frequency range</b>	5		120	MHz	
<b>Standard frequencies</b>	10 / 16.384 / 20.000			MHz	
<b>Frequency stability</b>				ppm	
Initial tolerance		± 500		ppb	@+25°C, V <sub>C</sub> = 2.5V
vs. temperature in operating temperature range (steady state)			± 100 ± 50 ± 25 ± 10 ± 5	ppb ppb ppb ppb ppb	Option II = "100" Option II = "50" Option II = "25" Option II = "10" Option II = "5"
operating temperature range	-10		+60	°C	Note 2
vs. supply voltage variation			± 2	ppb	V <sub>S</sub> ± 5%
vs. load change			± 2	ppb	
long term stability (aging) per year after 30 days operation			± 200 ± 100	ppb/year ppb/year	Option II = "100" All other Options II
<b>Frequency adjustment range</b>					
Electronic Frequency Control (EFC) range	± 0.8 ± 1	± 1		ppm ppm	5 MHz to 12.8 MHz >12.8 MHz
EFC voltage V <sub>C</sub>	0.25		4.75	V	
EFC slope (Δf / ΔV <sub>C</sub> )	positive				
EFC input impedance	100			kΩ	
<b>RF output</b>					
Signal waveform	Sine wave				
Load	50			Ohm	
Output amplitude	+3			dBm	Note 5
Warm-up time @25°C			5	min	Δf <sub>final</sub> /f <sub>0</sub> < ±0.1 ppm
Phase noise @10.0 MHz Option II = „50“		-120 -140 -145 -155		dBc dBc dBc dBc	10 Hz 100 Hz 1000 Hz 10000 Hz
<b>Reference voltage VREF output</b> (Note 3)		3.0 5.0		V V	Option I = "50" Option I = "12"
<b>Supply voltage V<sub>S</sub></b>	4.75 11.4	5.0 12	5.25 12.6	V V	Option I = "50" Option I = "12"
<b>Current consumption</b> (steady state) @ +25°C			200 100	mA mA	Option I = "50" Option I = "12"
<b>Current consumption</b> (warm-up)			500 250	mA mA	
<b>Operable temperature range</b>	-30		+75	°C	
<b>Storage temperature range</b>	-40		+85	°C	
<b>Enclosure (see drawing) LxWxH</b> (Note4)	36.1x27.2x19.4 max.			mm	IEC 60679-3 CO 08
<b>Weight</b>			30	gram	
<b>Packing</b>	Palette				
<b>Handling and Testing</b>	In accordance with AXAN-011				www.axtal.com
<b>Processing</b>	In accordance with AXAN-012				www.axtal.com


**Notes:**

1. Terminology and test conditions are according to IEC standard IEC60679-1, unless otherwise stated
2. Other operating temperature ranges on request
3. Other reference voltages on request
4. Lower height H available on request
5. Higher output level on request

## Ordering Code:

Model (Specification)	Option I	Option II	Frequency [MHz]
AXIOM45	50	100	10.000

## Enclosure:

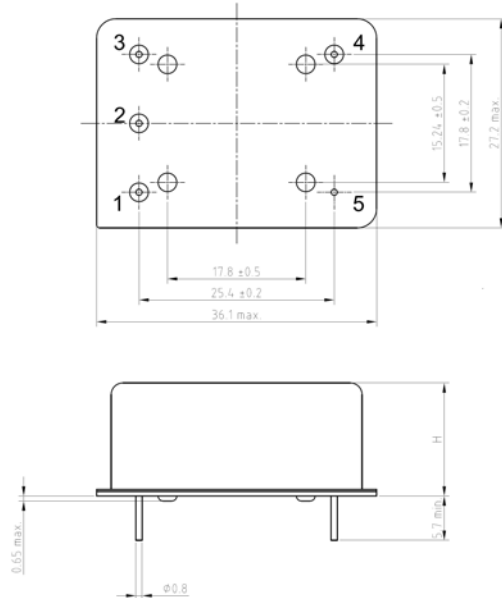

## Pin connections

Pin #	Symbol	Function
1	V <sub>C</sub>	Control Voltage (EFC)
2	VREF	Reference Voltage
3	V <sub>S</sub>	Supply Voltage
4	RF OUT	RF Output
5	GND	Ground

## Environmental conditions:

Test	IEC 60068 Part ...	IEC 60679-1 clause ...	Test conditions
Sealing tests (if applicable)	2-17	4.6.2	Gross leak: Test Qc, Fine leak: Test Qk
Solderability Resistance to soldering heat	2-20 2-58	4.6.3	Test Ta (235 ± 5)°C Method 1 Test Tb Method 1A, 5s
Shock*	2-27	4.6.8	Test Ea, 3 x per axes 100g, 6 ms half-sine pulse
Vibration, sinusoidal*	2-6	4.6.7	Test Fc, 30 min per axes, 10 Hz - 55 Hz 0,75mm; 55 Hz - 2 kHz, 10g
Endurance tests - ageing - extended aging		4.7.1 4.7.2	30 days @ 85°C, OCXO @25°C 1000h, 2000h, 8000h @85°C

Other environmental conditions on request