

Specification	AXLE10S	Issue: 03	Date: 2008-09-29
----------------------	----------------	-----------	------------------

Oscillator type : TCXO with Stratum III stability incl. holdover

Parameter	min.	typ.	max.	Unit	Condition	
Frequency range	5		20	MHz		
Standard frequencies	12.800 / 16.384 / 19.440 / 20.000 / (38.880)			MHz		
Frequency stability				ppm		
Initial tolerance			± 0.8	ppm	@+25°C	
vs. temperature in operating temperature range (steady state) * see Note 3	Frequency stability				Temperature	Option I
			± 0.28	ppm	0°~+50°C	"528"
			± 0.28*	ppm	0°~+70°C	"728" *
			± 0.28*	ppm	-20°~+70°C	"2728" *
			± 0.28*	ppm	-40°~+85°C	"428"*
		± 0.5	ppm	0°~+70°C	"750"	
vs. supply voltage variation			± 0.3	ppm	V _S ± 5 %	
vs. load change			± 0.1	ppm	R _L ± 10 %	
24 hours drift			± 0.04	ppm	GR-1244-CORE	
24 hours holdover in operating temperature range and V _S ± 5 %			± 0.37	ppm	Not for option I = "750"	
long term (aging) over 15 years			± 3	ppm	@ +40°C	
Long term overall stability ² 15 years			± 4.6	ppm	See Note 2	
Frequency adjustment range						
Electronic Frequency Control (EFC)	N.A.			ppm	N.A.	
RF output						
Signal waveform	HCMOS					
Load	15			pF		
Rise & decay time			5	ns		
Symmetry (duty cycle)	45		55	%	@ V _S /2	
Start-up time			10	ms	@ V _S - 5%	
Supply voltage V_S	4.75	5.0	5.25	V	Option II = "50"	
	3.13	3.3	3.47	V	Option II = "33"	
Current consumption (steady state)			10	mA	Option II = "50"	
			20	mA	Option II = "33"	
Enable/disable function	Pin 2 = HIGH or OPEN: Output Enable Pin 2 = LOW: Output High Z					
Operable temperature range	-45		+90	°C		
Storage temperature range	-45		+90	°C		
Enclosure (see drawing) L x W x H	15.1x9.5x6.0 max			mm	IEC 61837 CO 27	
Weight			3	gram		
Packing	Tape & reel				IEC 60286-3	
ESD Sensitivity	1500			V	HBM as in IEC 61000-4-2	


Notes:

1. Terminology and test conditions are according to IEC standard IEC60679-1, unless otherwise stated
2. Overall frequency stability = initial tolerance + temp. stability + supply & load change + aging
3. *These options only available for frequencies 12.8 MHz and 19.44 MHz

Ordering Code:

Model (Specification)	Option I stability	Option II supply	Frequency [MHz]
AXLE10S	528	33	12.800

Enclosure drawing

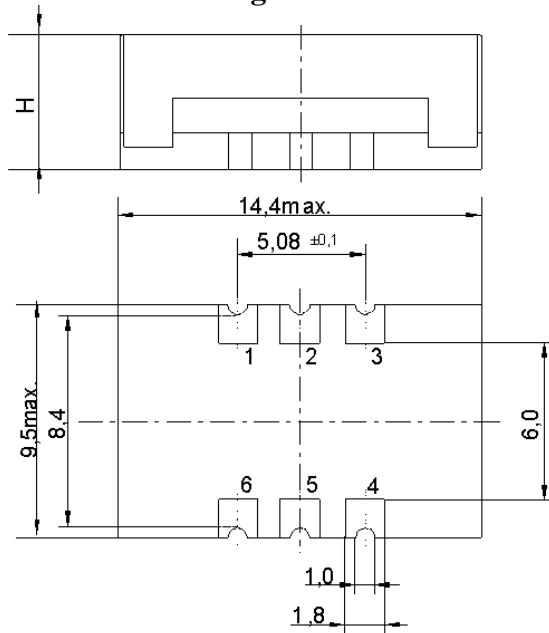

Pin connections

Pin #	Symbol	Function
1	N.C.	No Connection
2	E/D	Enable/Disable Input
3	GND	Ground
4	RF OUT	RF Output
5	N.C.	No Connection
6	Vs	Supply Voltage

Environmental conditions

Test	IEC 60068 Part ...	IEC 60679-1 clause ...	Test conditions
Visual inspection, dimensions		4.3	Enclosure styles as in IEC 60679-3 or 61837, if applicable
Sealing tests (if applicable)	2-17	4.6.2	Gross leak: Test Qc, Fine leak: Test Qk
Solderability Resistance to soldering heat	2-20 2-58	4.6.3	Test Ta (235 ± 5)°C Method 1 Test Tb Method 1A, 5s
Shock*	2-27	4.6.8	Test Ea, 3 x per axes 100g, 6 ms half-sine pulse
Bump*	2-29	4.6.6	Test Eb, 4000 bumps per Axes, 40g, 6 ms
Free fall*	2-32	4.6.9	Test Ed procedure 1, 2 drops from 1m height
Vibration, sinusoidal*	2-6	4.6.7	Test Fc, 30 min per axes, 10 Hz - 55 Hz 0,75mm; 55 Hz - 2 kHz, 10g
Rapid change of temperature	2-14	4.6.5	Test Na, 10 cycles at extremes of operating temperature range
Dry heat	2-2	4.6.14	Test Ba, 16 h at upper temperature indicated by climatic category
Damp heat, cyclic*	2-30	4.6.15	Test Db variant 1 severity b), 55°C/95% r.H., 6 cycles
Cold	2-1	4.6.16	Test Aa, 2 h at lower temperature indicated by climatic category
Climatic sequence*	1-7	4.6.17	Sequence of 4.6.14, 4.6.15 (1 st cycle), 4.6.16, 4.6.15 (5 cycles)
Damp heat, steady state*	2-3	4.6.18	Test Ca, 56 days
Endurance tests - ageing - extended aging		4.7.1 4.7.2	30 days @ 85°C, OCXO @25°C 1000h, 2000h, 8000h @85°C