


Specification	AXQCM610A	Rev.: 1	Date: 2020-10-04
---------------	-----------	---------	------------------


Quartz Crystal Microbalance Element (Monitor Crystal)



Parameter	min.	typ.	max.	Unit	Condition
Nominal frequency		6.000		MHz	
Adjustment frequency		5.985		MHz	
Crystal cut		SC			
Overtone		1			
Frequency tolerance	-5		+5	kHz	
Frequency stability					
Over operating temperature range	-50		+50	ppm	
Resonance resistance R_r			15	Ω	
Motional capacitance C_1				fF	
Shunt capacitance C_0			20	pF	
Drive level		100		μ W	
Operating temperature range	+60	+70	+80	$^{\circ}$ C	
Storage temperature range	-40		+105	$^{\circ}$ C	
QCM diameter	13.97 +0/-0.03			mm	Plano-convex
Convex radius R	210			mm	
Blank surface quality	Fine lapped				$R_a = 0.8 \sim 1.6 \mu\text{m}$
Electrode diameter Side A	13.0 \pm 0.1			mm	Fully plated
Electrode material Side A	Cr-Au				
Electrode diameter Side B	6.4 \pm 0.1			mm	See drawing
Electrode material Side B	Cr-Au				

Side A (Plane)

Side B (Convex)

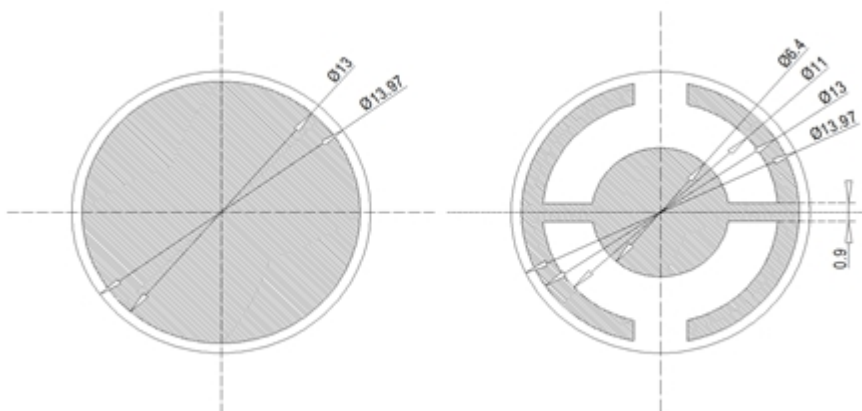

Ordering Code:

Model (Specification)	Revision	Frequency [MHz]
AXQCM610A	1	5.985

Revision History

Rev.	Drawing	Date [dd.mm.yyyy]	Remarks	Author	Checked
1	D0	04.10.2020	First issue AXQCM610A	BN	BN