


Specification	AXQCS1011A	Rev.: 1	Date: 2021-12-09
---------------	------------	---------	------------------

Quartz Crystal Sensor Element




Parameter	min.	typ.	max.	Unit	Condition
Nominal frequency		10.000		MHz	
Adjustment frequency		10.000		MHz	
Crystal cut		AT			35°15'±2'
Overtone		1			
Frequency tolerance	-20		+20	kHz	
Frequency stability					
Over operating temperature range	-50		+50	ppm	
Resonance resistance R _r			15	Ω	
Motional capacitance C ₁				fF	
Shunt capacitance C ₀			20	pF	
Drive level		100		μW	
Operating temperature range	0		+70	°C	
Storage temperature range	-40		+105	°C	
QCM diameter		13.97 +0/-0.03		mm	Plano-plano
Blank surface quality		Polished			R _a = 0.012 ~ 0.05 μm
Electrode diameter Side A		5.0		mm	Anchor, wrapped around
Electrode material Side A		Ti-Au			
Electrode diameter Side B		5.0		mm	Key hole, wrapped around
Electrode material Side B		Ti-Au			

Side A (Plane)

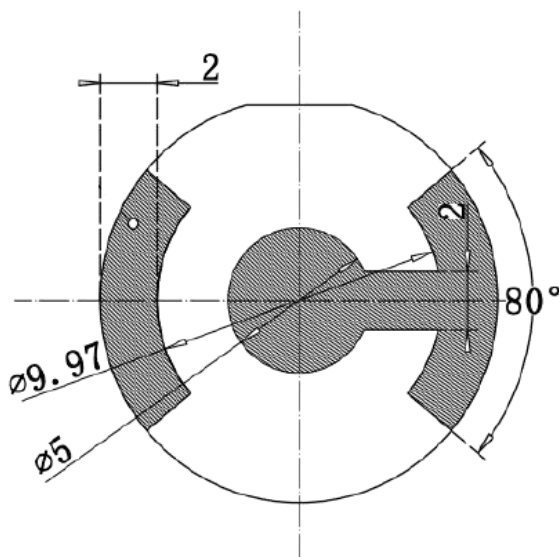

Side B (Plane)

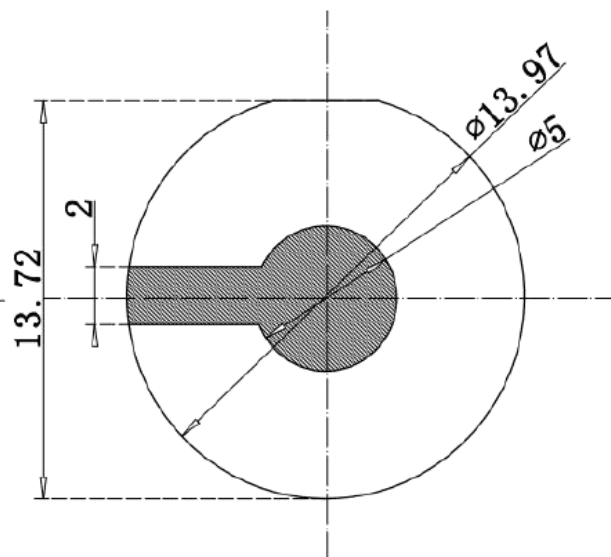

Ordering Code:

Model (Specification)	Revision	Frequency [MHz]
AXQCS1011A	1	10.000

Revision History

Rev.	Drawing	Date [dd.mm.yyyy]	Remarks	Author	Checked
1	D0	09.12.2021	First issue AXQCS1011A	BN	BN